

Constant Current LED Driver

## Model Number AC25CD700A2Q

Input Voltage: I20-277VAC (±10%) Dimming: 5 to 100% Input Frequency: 50/60Hz Surge Protection: 2Kv

Side Mount/Leads

## **PHYSICAL:**

Dimensions					
Length	2.88"				
Width	1.43"				
Height	1.07"				
Mounting	2.68"				
Weight	0.15 lbs.				



## The Smallest Possible Form Factors™



## **Actual Size**


## **ELECTRICAL SPECIFICATIONS:**

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	IP Rating	Dimming Protocol	Dimming Range	Efficiency Up To
25.2W	28.6W	0.27A@120V 0.11A@277V	>0.9	<20	24-36V	700mA±5%	75° C	0° C	50	0 to 10V	5 to 100%	88%

## **WIRING:**

#### INPUT

#### OUTPUT



Lead Lengths							
Black	6"	Blue	6"	Purple	6"		
White	6"	Red	6"	Gray	6"		

Approved Dimmers							
Lutron	NTSTV-DV	Leviton	IP7I0 DL				
Lutron	NFTV	Watt Stopper	ADF 120277				

#### **SAFETY & PERFORMANCE:**

- Class P Listed
- · Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- · LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- Warranty: 5 yrs based on max case temp
- of 75°C\*
- Input/Output Isolation
- Surge Protection (2 KV)
- Dimming Curve on the next page

• Max Remote installation distance is 33 ft

## **INSTALLATION:**

- LED drivers shall be installed inside electrical enclosures
- 22 AWG 600V/105C tinned stranded copper lead-wires are required to use in installation



\*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years from date of manufacture when operated at max case temp of up to ≤75°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

#### 3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com


Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.





## "Match-Book Sized" LED Driver Family The Smallest Possible Form Factors



# **AC25CD700A2Q**

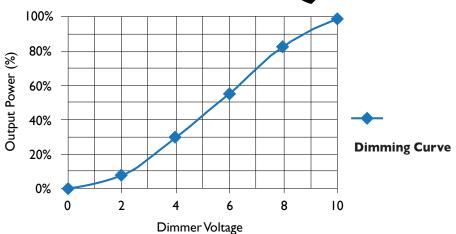

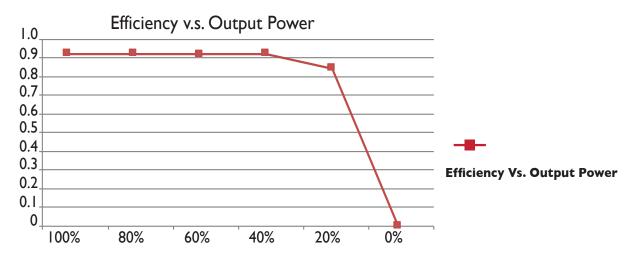

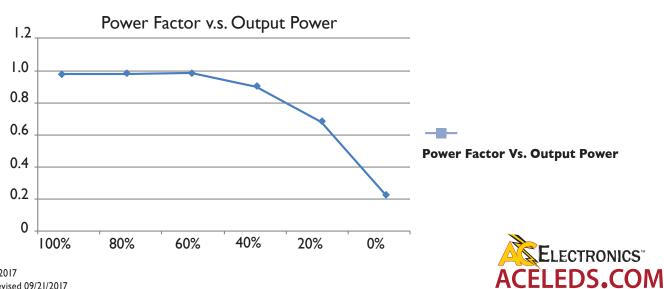

©2017 Revised 09/21/2017