

## T1M1UNV024V-150L

### **SPECIFICATION**



0-10V Dimming

- Thoro LED Driver
- U-OUT 24V
- IP 67 Dry or Damp
- Suitable for Class I luminaire

- Universal Voltage:100-277V~,50/60Hz
- Output Voltage: 24V---Output Power: 150W
- Output Current: 6.25A Max.

#### This Driver Will Operate The Following LED Modules:

Any LED module designed to accept constant voltage input of 24VDC and has a maximum current of 6.25A.

#### **General Specifications**

Input Voltage	100-277V~, 50/60Hz
Input Current	1.71A @100VAC, 0.61A @277VAC
Input Power	168W
Power Factor	>0.9
THD	<20%
Efficiency	>90% @120VAC Full Load
Driver Type	Constant Voltage
Output Voltage Range	24V
Output Current	6.25A Max.
Output Power	150W
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	0-10VDC
RFI/EMI	FCC Part 15B Consumer, EN55015
Output Type	Non-Class 2
Sound Rating	A
Surge Protection	Line-Line 4kV, Line-Earth 6kV
	Input Current Protection
	Output Short Circuit Protection
Protections	Output Open Circuit Protection
	Output To Ground Short Protection
	Overload Protection
Max. Case Temperature	89°C(192.2°F)
ta	-40°C to 53°C(-40°F to127.4°F)
Service Life	50,000 hours @Tc 75°C(167°F)
Approvals / Class	CE, cURus, IP 67, RoHS, Dry or Damp Locations, Type HL, Type TL
Warranty	5 years

Figure 1


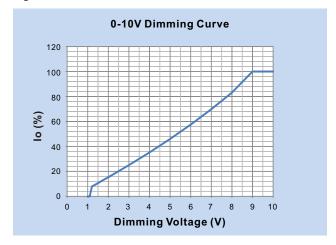


Figure 2



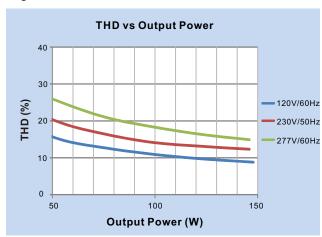

## T1M1UNV024V-150L

**SPECIFICATION** 



Figure 3

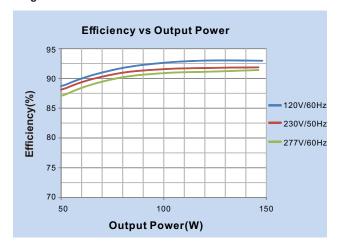


Figure 4



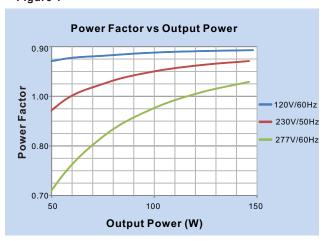


Figure 5

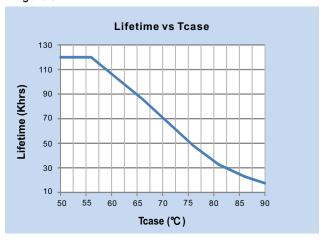

#### **Mechanical Data**

LENGTH	WIDTH	HEIGHT
227mm	67.5mm	39.5mm
8 94"	2.66"	1.56"

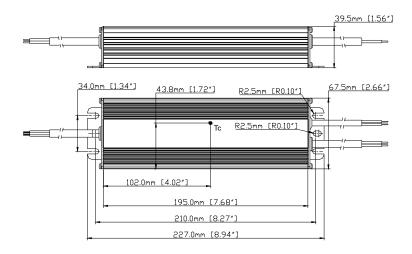

Case Tolerance=±0.02"



# T1M1UNV024V-150L


#### **SPECIFICATION**



### **Wiring Diagrams**

INPUT SIDE	LENGTH
BLK	610mm [24"]
WHT	610mm [24"]
GRN(GND)	610mm [24"]

OUTPUT SIDE	LENGTH
PUR	610mm [24"]
GRY	610mm [24"]
RED	610mm [24"]
BLK	610mm [24"]



#### NOTE:

1. This Driver Must Be Installed By A Licensed Electrician

2. This Driver Must Be Grounded